


REAR SPRINGS			
L	LOAD LBS.	RATE LBS. PER SPRG. PER INCH	SPRG. N°
14 9/16	8500	3420	924313
14 9/16	UP TO 4910	1785	
16 3/8	10000	3938	1267406
16 3/8	UP TO 4950	2078	


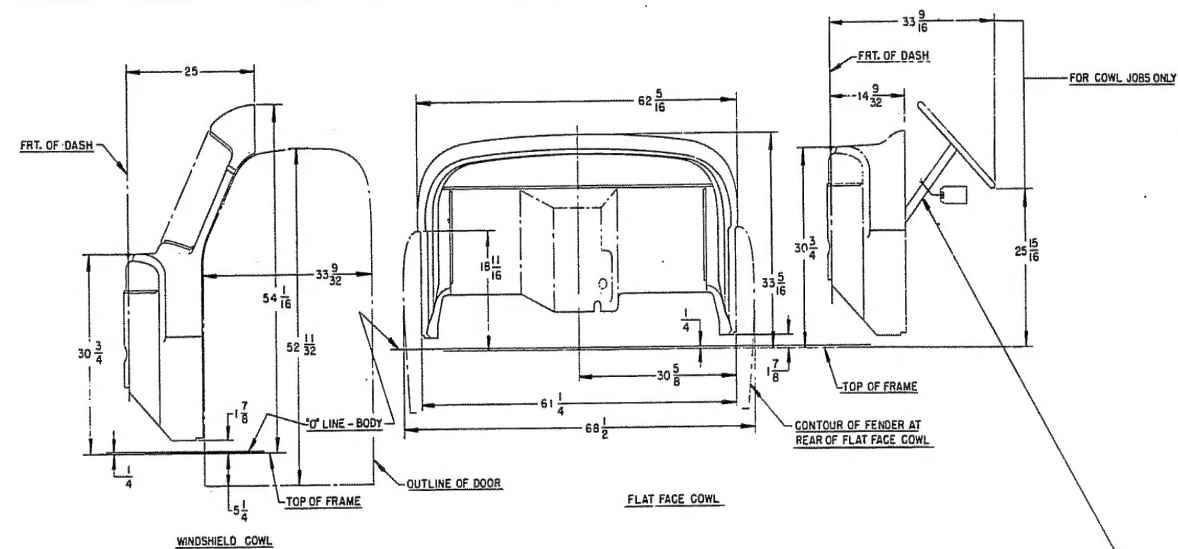


P.T.O. OPENING: S.A.E. STD. LARGE ON BOTH SIDES  
GEAR: TRANS. COUNTERSHAFT P.T.O. 43 1/2 6/8 R. 20" P.A.  
SPEED RATIO: 481 R.P.M. TO 1000 R.P.M. (ENG.)  
SPEED RATIO (OVERDRIVE): 540 R.P.M. TO 1000 R.P.M. (ENG.)  
ROTATION: OPPOSITE ENGINE  
ENGINE SPEED GOVERNED AT 3000 R.P.M.

## WARNING TO BODY BUILDERS

STEERING WHEEL LOCATION IS FIXED FOR STANDARD DODGE CAB SEAT PEDALS, FLOOR AND WINDSHIELD POSITIONS, AND IS ADJUSTABLE ONLY TO A LIMITED DEGREE FOR NORMAL COMMERCIAL VARIATION OF THESE POSITIONS.

IF NECESSARY, ADJUSTMENTS SHOULD BE MADE AT FRAME FASTENING AND AT INSTRUMENT PANEL BRACKET TO AVOID STRAIN ON STEERING GEAR, COLUMN, OR MOUNTINGS.

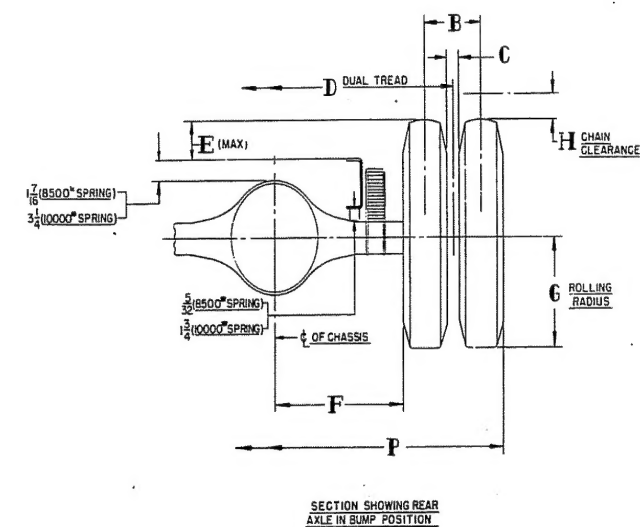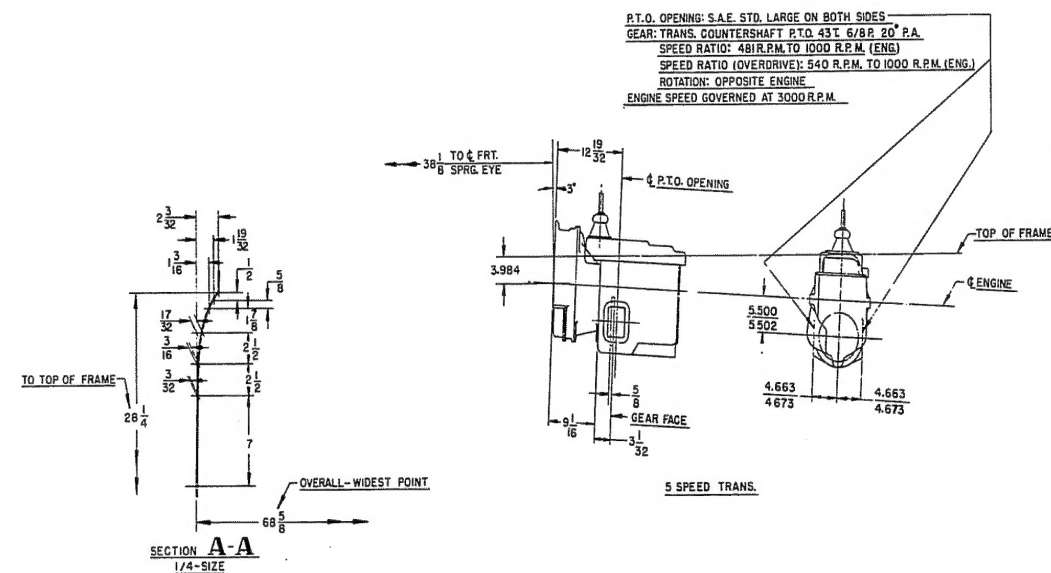

PRINT # 1270641

BODY BUILDERS LAYOUT  
Y, YA-130", 142" W.B. (TRACTOR)